


```
/usr/local/etc/opup_club/etc/opup_club.ini
```

```

smsgengine_t ucd
object = inout
# server that receives xml from t ucd and sends xmlrpc to o2
smsgout localhost, port 8988 from t ucd suggest ed
out address = localhost
out port = 8152
smsgin localhost, port 8151 from t ucd suggest ed
in address = localhost
in port = 8151

```

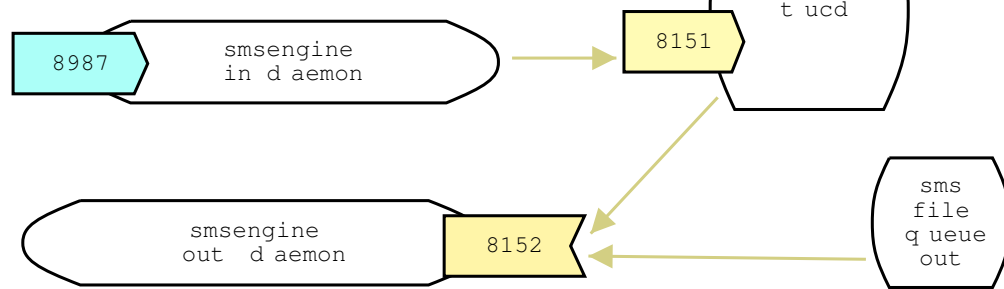

```
[t opup_club]
ip = 0.0.0.0
port = 8151
t mpd ir = /home/st elia/src/it g/t opup_club/t mp

[SMSkeyword s]
regist rat ion = REGISTER
serial valid ation = VALIDATE
unsubscribe = UNSUB

[SMSServers]
servers = localhost :8152

[mops]
nip = 192.168.1.146
nip_port = 4343

[d at abase]
t uc_d bserver = localhost
t uc_d bname = t opup_club
t uc_d buser = root
t uc_d bpass = ' '
t uc_d bt ype = mysql
mmngr_d bserver = localhost
mmngr_d bname = mops_mngr
mmngr_d buser = root
mmngr_d bpass = ' '
mmngr_d bt ype = mysql
mops_d bservers = bakunin

[localhost_d bserver]
mops_d bserver = localhost
mops_d bname = mops_online
mops_d buser = root
mops_d bpass = ' '
mops_d bt ype = mysql

[bakunin_d bserver]
mops_d bserver = bakunin.d ev.ie.alphyra.com
mops_d bname = mops_online
mops_d buser = root
mops_d bpass = ' '
mops_d bt ype = mysql
```